


REV.	Description	Date
	upgrade drawing	2016/10/7
1	BOM list revise	2017/3/14
2	rate voltage revise	2017/11/30

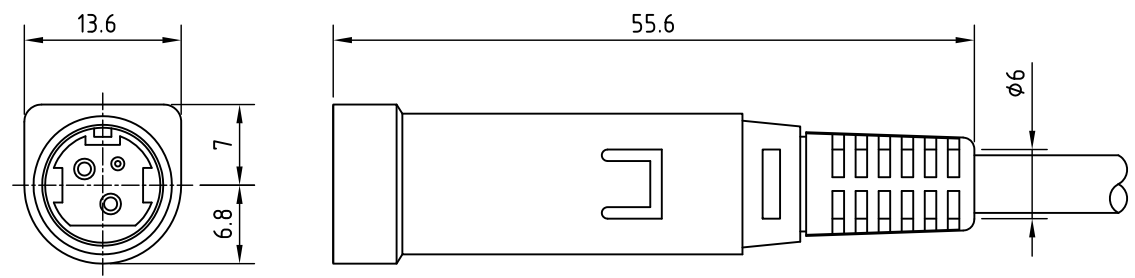

Specification

- Current rating: Large Pin 7.5A max.
Small Pin 1A max.
- Rated voltage: 48V/DC max.
- Contact resistance: Large Pin 30mΩ max.
Small Pin 50mΩ max.
- Insulation resistance: DC 250V 50MΩ min.
- Voltage withstand: AC 250V / 1 minute
- Insertion force: 3.5kgs max.
- Withdrawal force: 0.5-2.5Kgs

RoHS
TOLERANCE X±0.5 X.X±0.3


5	Terminal	BSR-H	Tin ptd.
4	Plastic core	ABS	
3	Cover	BSR-H	Nickel ptd.
2	Trail	PVC	
1	Body	ABS	
Item	Description	Material	Treat & Remark



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2017/11/30	PART NO.	UT-A001-3SCA
DWN	GINA	REV.	2
CHK			
ITEM	Circular Power Connector Push Lock Type	UNIT	MM

REV.	Description	Date
	upgrade drawing	2016/10/7
1	BOM list revise	2017/3/14
2	rate voltage revise	2017/11/30

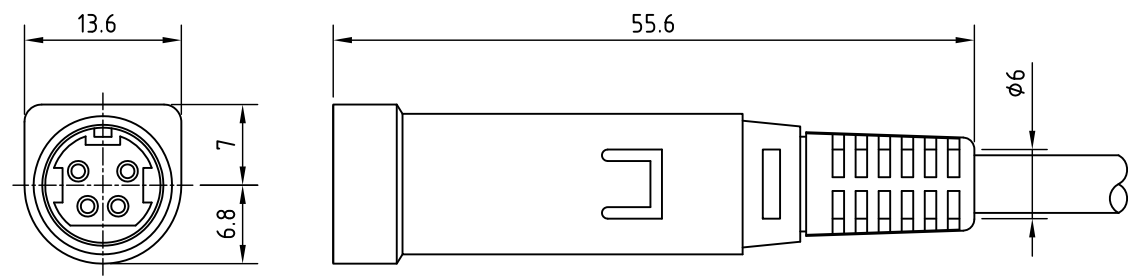

Specification

1. Current rating: 7.5A max.
2. Rated voltage: 48V/DC max.
3. Contact resistance: 30mΩ max
4. Insulation resistance: DC 250V 50MΩ min.
5. Voltage withstand: AC 250V / 1 minute
6. Insertion force: 3.5kgs max.
7. Withdrawal force: 0.5-2.5Kgs

RoHS
TOLERANCE X±0.5 X.X±0.3

5	Terminal	BSR-H	Tin ptd.
4	Plastic core	ABS	
3	Cover	BSR-H	Nickel ptd.
2	Trail	PVC	
1	Body	ABS	
Item	Description	Material	Treat & Remark



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2017/11/30	PART NO.	UT-A001-4SCA
DWN	GINA	REV.	2
CHK			
UNIT	MM		

ITEM	Circular Power Connector Push Lock Type
------	---