


REV.	Description	Date
1	part no. revise	2016/10/27

Specification

1. Pitch=3.96mm
2. Current rating: 1A-7A
3. Volatge rating: 250V AC
4. Insulation resistance: 1000MΩ min.
5. Dielectric strength: AC 1500V / 1 minute

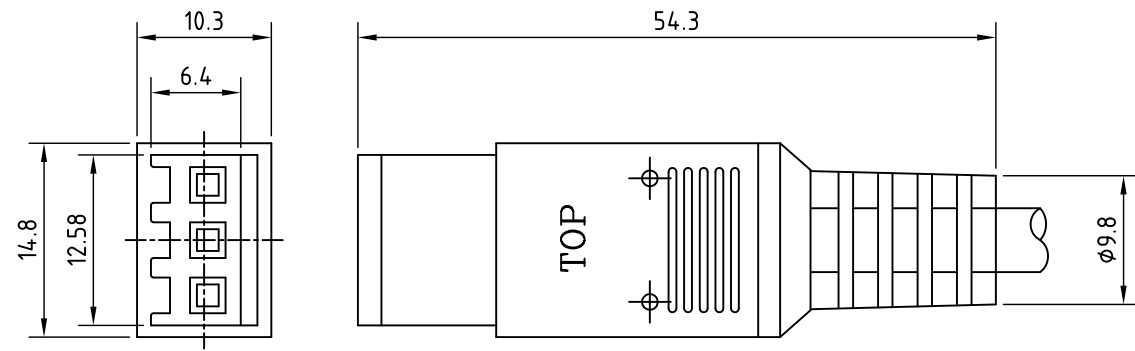

RoHS

TOLERANCE X±0.5 X.X±0.3



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

ITEM	Housing Connector Molded Cable	DATE	2016/10/27	PART NO.	UT-D021-3P
		DWN	GINA	REV.	1
		CHK			
		UNIT	MM		