


REV.	Description	Date

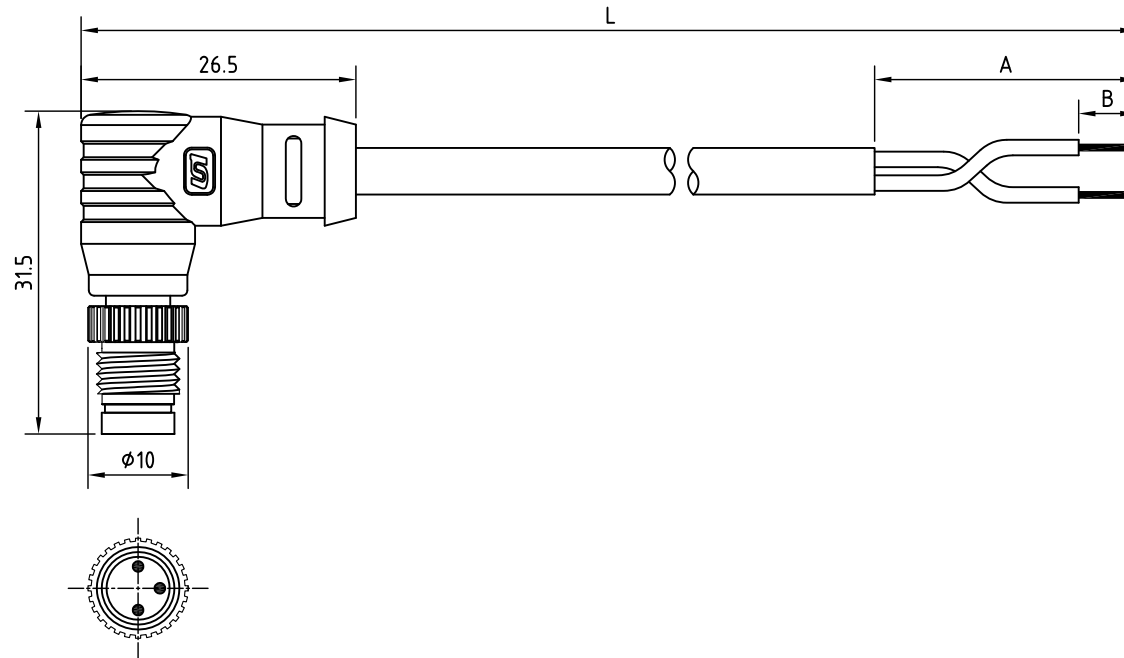

### Specification of connector

#### General Characteristics

Locking system : screw M8  
 Termination : solder  
 Shell protection : IP68  
 Contact resistance :  $\leq 10\text{m}\Omega$   
 Insulation resistance :  $\geq 10\text{M}\Omega$

#### Materials

Pin contact : brass  
 Contact plating : gold  
 Male insert : PA  
 Ring nut : chromium plated

### Specification of cable

Material Jacket	PVC	PUR

RoHS  
UL-Recognized file No.E359387

CONTACT ARRANGEMENT FRONT VIEW (MALE)		
	3P	4P
Rated voltage	125V	
Rated current	5A	



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2019/11/11	PART NO.	UT-D251M1-UL-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M8
------	---------------------