

REV.	Description	Date
1	spec. revise	2012/10/31
2	rate voltage revise	2014/6/13
3	contact resistance, insertion/withdrawal force revise	2016/4/19
4	rated current revise	2018/10/5


Specification of connector

- Locking system : screw M22
- Shell protection : IP67
- Rated voltage : 360V
- Rated current : Large pin 35A  
: Small pin 10A
- Contact resistance : Large pin <5mΩ  
: Small pin <30mΩ
- Insertion force : <80N
- Withdrawal force : <80N

- Materials
- Pin contact : brass
  - Contact plating : gold
  - Male insert : PA
  - Ring nut : chromium plated

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

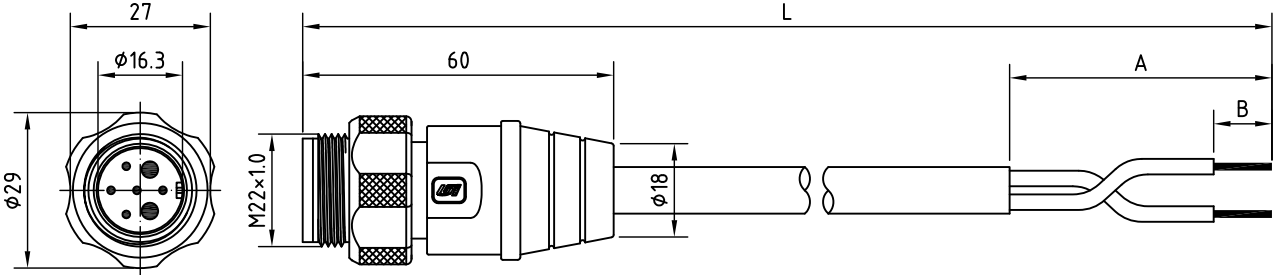

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)								
	2P	3P	4P	5AP	5BP	6AP	6BP	7P



**Unicable Co., Ltd. 國陽電業有限公司**  
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D259M1-XP
DWN	GINA	REV.	4
CHK			
ITEM	High Power M22	UNIT	MM