


REV.	Description	Date
	upgrade drawing	2016/10/7
1	part no. revise	2016/10/27

Specification

1. Current carrying capacity: 12V DC 2A max.
2. Contact resistance: 30mΩ max.
3. Insulation resistance: DC 250V 50MΩ min.
4. Dielectric strength: AC 250V / 1 minute
5. Insertion force: 4.5Kgs max.
6. Withdrawal force: 0.9-3Kgs

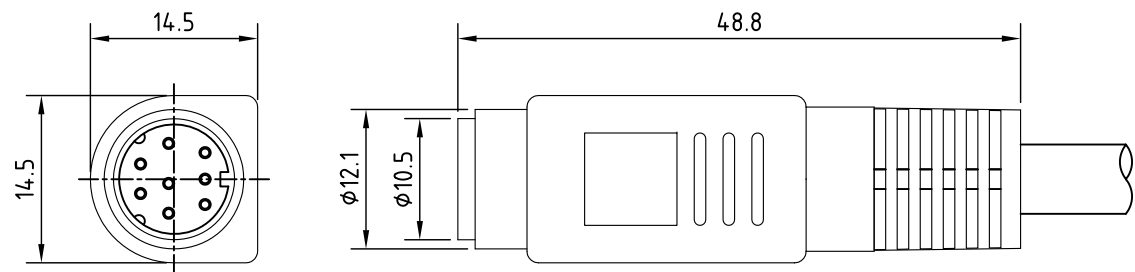

RoHS
TOLERANCE X±0.5 X.X±0.3

CONTACT ARRANGEMENT FRONT VIEW	3P	4P	5P	6P	7P	8P



Unicable Co., Ltd. 國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/27	PART NO.	UT-P194-XP
DWN	GINA	REV.	1
CHK			
ITEM	Molded Push Lock MINI DIN Connector Cable	UNIT	MM