

REV.	Description	Date
1	upgrade drawing	2014/3/21
2	rated voltage revise	2018/10/5

Specification of connector

General Characteristics


Locking system : screw M8
Termination : solder
Shell protection : IP68
Contact resistance : $\leq 10\text{m}\Omega$
Insulation resistance : $\geq 10\text{M}\Omega$

Materials

Socket contact : brass
Contact plating : gold
Female insert : PA
Ring nut : PA
O-ring : rubber

Specification of cable

Material Jacket	PVC	PUR

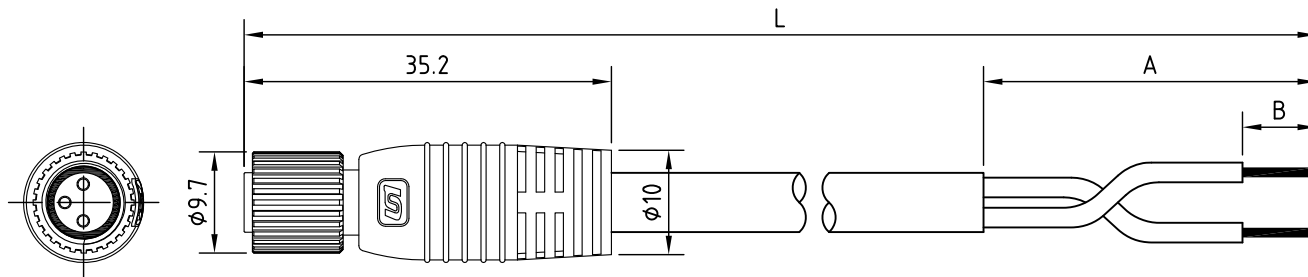

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	3P		4P		5P		6P	
Rated voltage	125V				60V			
Rated current	5A				2A			



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

ITEM	Sensor Connector M8	DATE	2018/10/5	PART NO.	UT-P251F2-XP
		DWN	GINA	REV.	2
		CHK			
		UNIT	MM		