


REV.	Description	Date

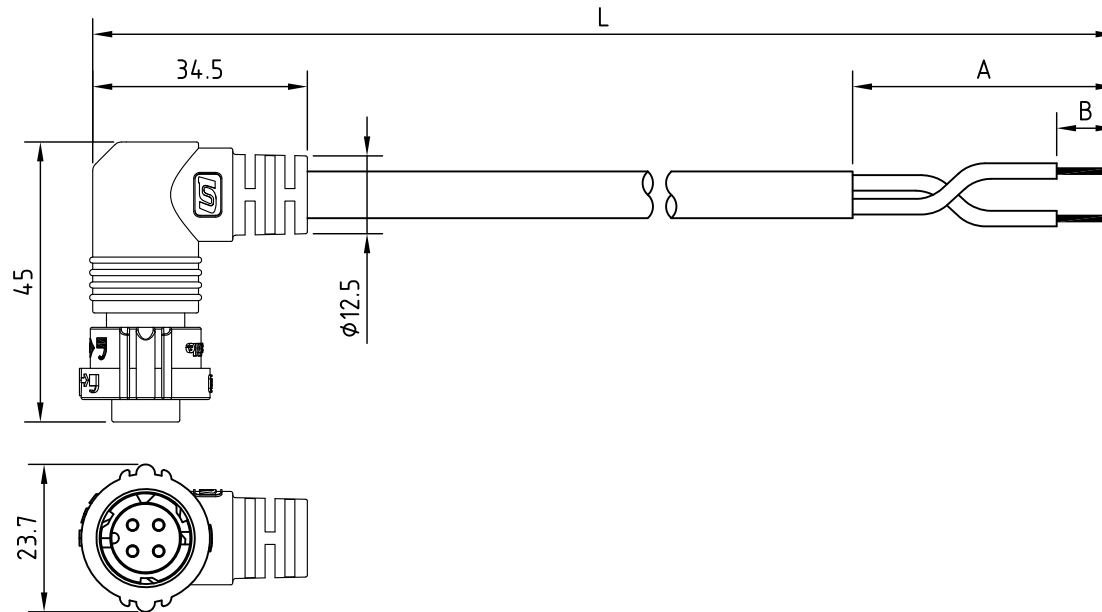

Specification of connector

Locking system : Quick Push Lock
 Termination : solder
 Shell protection : IP68
 Contact resistance : <10mΩ
 Insulation resistance : >10MΩ

Materials

Pin contact : brass
 Contact plating : gold
 Female insert : PA
 Ring nut : PA

Specification of cable

Material Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4AP	4BP	5P	6P	7P	8P
Rated voltage	250V			250V		60V		
Rated current	10A			5A		5A		



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2019/12/17	PART NO.	UT-D364F1-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Type J(J2): female conn. 2-8P
------	-------------------------------