

REV.	Description	Date
1	part number change	2025/7/30


Specification of connector

Locking system : Quick Push Lock
 Termination : solder
 Shell protection : IP68
 Contact resistance : <10mΩ
 Insulation resistance : >10MΩ

Materials
 Pin contact : brass
 Contact plating : gold
 Female insert : PA
 Ring nut : PA

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

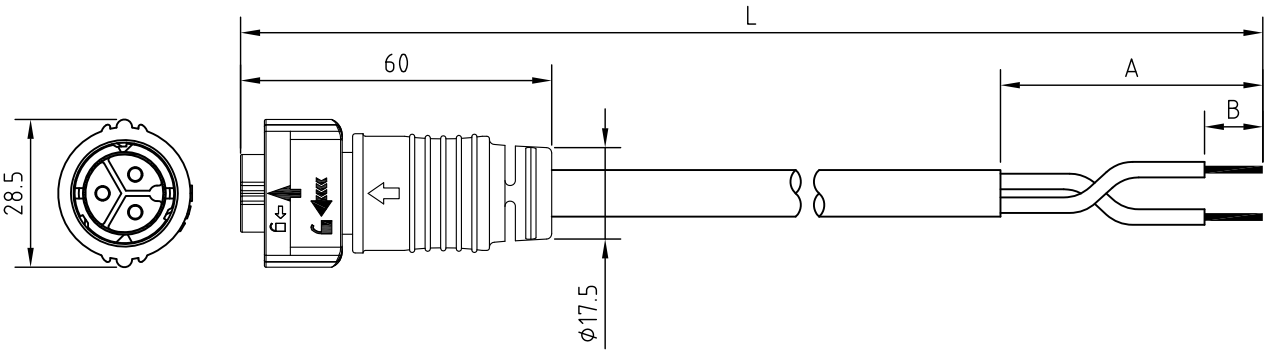

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)					
	2P	3P	4P	5P	6P
Rated voltage	300V		250V	60V	
Rated current	20A		10A	10A	



Unicable Co., Ltd.國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

PART NO.	3103D-A02F11xxx-01/UT-D365F2-XP		
DATE	2025/7/30	UNIT	MM
DWN	GINA	REV.	1
CHK			

ITEM	Type J(J4): female conn. 2-6P
------	-------------------------------