

REV.	Description	Date
1	part number change	2025/6/26

Specification of connector

- Locking system

: Quick Push Lock
- Termination

: solder
- Shell protection

: IP68
- Contact resistance

: <10mΩ
- Insulation resistance

: >10MΩ
- Materials
- Pin contact


: brass
- Contact plating

: gold
- Male insert

: PA

Specification of cable

Material	Jacket	PVC	PUR
----------	--------	-----	-----

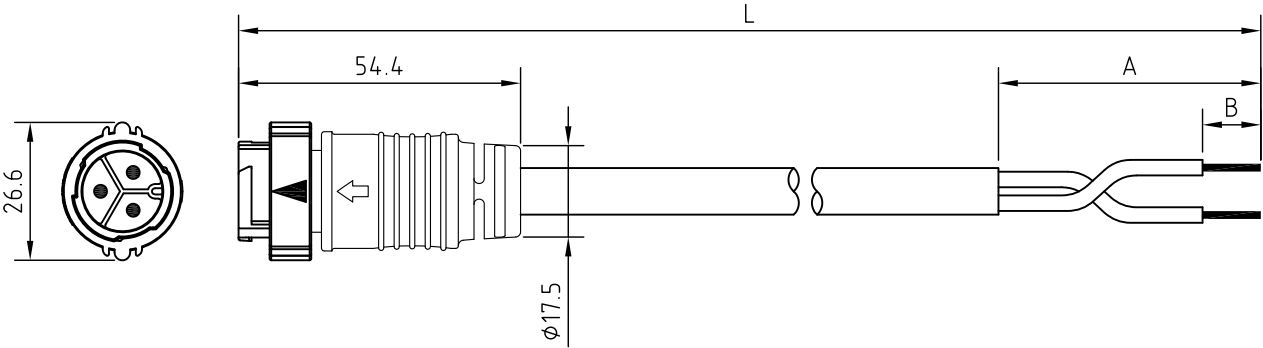

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)	02P	03P	04P	05P	06P
Rated voltage	300V		250V	60V	
Rated current	20A		10A	10A	



Unicable Co., Ltd.國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

ITEM	Type J(J4): male conn. 2-6P	PART NO.	3103D-A02M21xxx-01/UT-D365M2-XP		
		DATE	2025/6/26	UNIT	MM
		DWN	GINA	REV.	1
		CHK			