

REV.	Description	Date
1	upgrade drawing	2015/10/19
2	取消箭頭logo	2017/2/20
3	part number change	2024/5/16

Specification of connector

General Characteristics

Locking system : screw M15
Termination : lathe/crimp, moulded
Shell protection : IP68

Electronical Characteristics


Rated voltage : 250V
Rated current : 12A
Contact resistance : $\leq 10\text{m}\Omega$
Insulation resistance : $\geq 10\text{M}\Omega$

Materials


Socket contact : brass
Contact plating : nickel plated
Female insert : PA

Specification of cable

Material Jacket	PVC	PUR

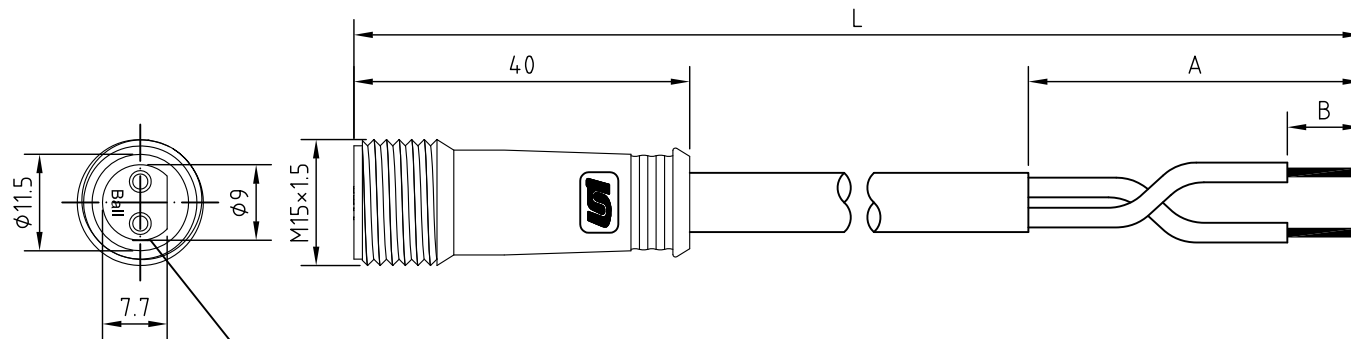

放大圖



RoHS

※符合球壓測試



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

PART NO.	3041A-A02F2302P-01/UT-D224-2P		
DATE	2024/5/16	UNIT	MM
DWN	GINA	REV.	3
CHK			

ITEM

In-Line Molded Cable M15