


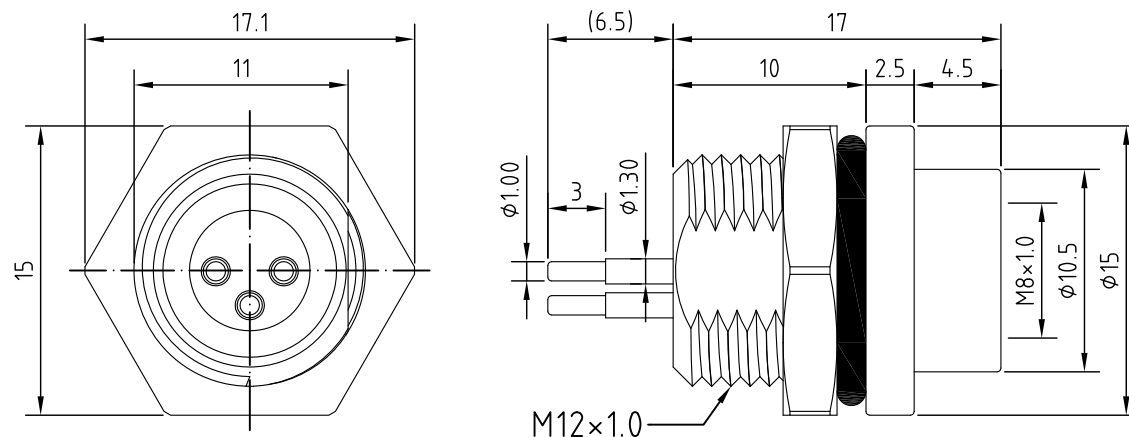

REV.	Description	Date
1	rated voltage revise	2018/10/5
2	part number change	2026/8/31

Specification of connector

Locking system : screw M8
 Termination : DIP
 Shell protection : IP68
 Rated voltage : 125V
 Rated current : 5A
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $>10\text{M}\Omega$

RoHS

TOLERANCE $X\pm0.5$ $.X\pm0.3$ $.XX\pm0.2$

PIN No.	03P	04P
CONTACT ARRANGEMENT FRONT VIEW (FEMALE)		
PCB Layout		

5	Nut	Brass/Nickel plated
4	O ring	Rubber
3	Body	Brass/Nickel plated
2	Pin	Brass/Gold plated
1	Housing	PA/UL94V-0
Item	Description	Material&Plating



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

ITEM	Sensor Connector M8(3-4PIN)	PART NO.	3011A-A13F24xxx-01/UT-SP205M1-XP-02		
		DATE	2026/8/31	UNIT	MM
		DWN	GINA	REV.	2
		CHK			